

7.3 Removing the door


Use the two splines:

open the door, insert the splines **G** into the slit of the hinges and push them towards the oven. Half-close the door upward to form an angle of approximately 45° , then lift up and slide off. For re-assembly, insert the hinges into its groove then let the door rest downwards and extract splines **G**

or

use two pins:

open the door completely and fit the pins **H** into the holes from the inside. Close the door to an angle of about 45° , lift it and remove it from its seat. To replace, fit the hinges into the grooves provided, then lower the door until it comes to rest and extract the pins. If the pins are lost, two screwdrivers can also be used.

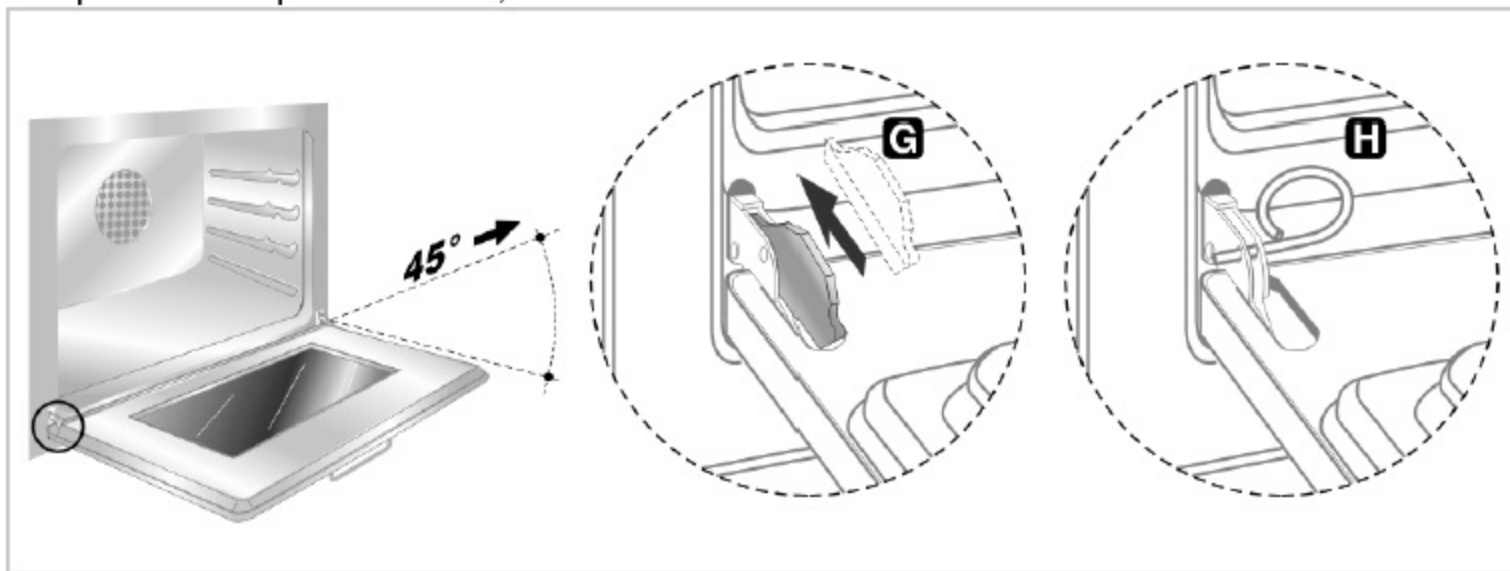

7.4 Cleaning the inside of the window on the door

The internal surfaces of the door glass can be cleaned by disassembling the components of the door itself. Proceed as described in paragraph "7.3 Removing the door"; loosen the 3 fastening screws and, by means of a screw-driver, lever upwards. Once the two door components have been separated, it is possible to carry out the cleaning of the internal surfaces of the glass. To reassemble the door, follow these instructions in reversed order.

