


## **SMEG L.E.D ELECTRONIC CLOCK**

### **HOW TO USE THE CLOCK**

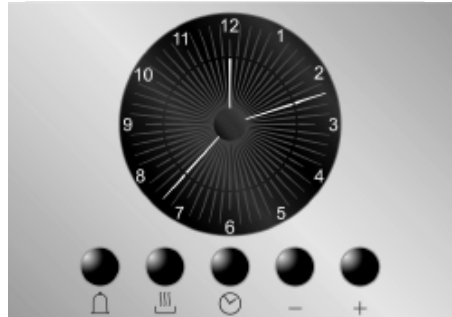

#### **TO SET THE TIME:**

**Button 1 commences on the left**

- Press button 3 as well as button 4 or 5 to adjust the time
- Release all buttons – the time is set

#### **TO SET THE MINUTE MINDER:**

- Press button 1 once
- Press button 4 or 5 to set the timer duration
- Each bar that lights up in the clock face equals 1 minute
- To cancel minute minder press button 1 and button 4 to minus the time
- To clear the alarm when it sounds, press button 1

#### **TO SET SEMI AUTOMATIC COOKING:**

- Select oven function and temperature
- Press button 2 once – the clock hands will move to 12 o'clock
- Press button 4 or 5 to set cooking time
- Each bar that lights up in the clock face equals 12 minutes so a 5 minute section equals 1 hour
- After a few seconds the clock will show time of day and remaining cook time
- Cooking will commence immediately
- The oven will switch off automatically at the end of the cooking time
- To cancel the setting press button 3 and hold for a few seconds

#### **TO SET AUTOMATIC COOKING:**

- Press button 2 – the clock hands will move to 12 o'clock
- Press buttons 4 or 5 to set cooking time
- Press button 2 – the clock will show present time
- Within 6 seconds press button 5 to move the illuminated section lead marker to the finish time
- Select oven function and temperature
- To cancel the setting press button 3 and hold for a few seconds

